

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

Exit/Emergency Lighting

New York City

NYCSRWBB	NYC 8" LED Red Battery Backup – Steel
NYCELSM-R	NYC 8" Red Edge Light - Surfaced Mount Battery Backup - Aluminum Housing
NYELR-R	NYC 8" Red Edge Light - Recessed Battery Backup
NYCA-AR	NYC 8" Die Cast Red Led - Battery Backup
NYCA-ARF	NYC 8" Die Cast Red Led Face
NYCOMBOR2	NYC 8" Combo Red – Steel
NYCOMBOR3	NYC 8" Combo Red 3 Heads – Steel
NYCEL2H18W	NYC Emergency Light 2Head 18W 6V - Steel
NYCEL3H36W	NYC Emergency Light 3Head 36W 12V – Steel
NYCELSM-RAC	NYC 8" Red Edge Light - Surfaced Mount AC Only – Aluminum
NYCSRW	NYC 8" LED Red AC Only Steel
NYELR-RAC	NYC 8" Red Edge Light - Recessed AC only
NYCSRBBB	NYC 8" LED Red Battery Backup Black - Steel
NYCA-ABR	NYC 8" Die Cast Red Led Black - Battery Backup
NYCA-BRF	NYC 8" Die Cast Red Led Black Face
NYCOMBOR2B	NYC 8" Combo Red Black – Steel
NYCOMBOR3B	NYC 8" Combo Red 3 Heads Black – Steel
NYCSRB	NYC 8" LED Red AC Only Black – Steel
NYCSRWBB	NYC 8" LED Red Battery Backup – Steel

.....*Not all products listed*

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" LED Red Battery Backup – Steel

Code: NYCSRWBB



Description:

New York City Approved Exit Sign. LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Height: 10.5"
- Width: 14.25"
- Depth: 2-1/4"

Features:• Universal 120/277 VAC transformers.

- Damp location rated.
- Rugged 20 gauge steel construction.
- Universal K/O chevrons.

NYC 8" Red Edge Light - Surfaced Mount Battery Backup - Aluminum Housing


Code: NYCELSM-R



Description:

New York City Approved Exit Sign. An efficient and secure Exit Sign for surfaced mount. Wall and ceiling bracket included. Brushed aluminum housing. Includes backup battery, 120/277 Volt Operation.

Additional Information:

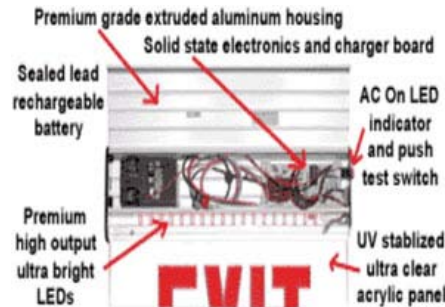

Features:• 5 watts for battery backup units.

- Field installable directional indicators.
- AC on indicator light and test switch.
- Sealed lead battery on emergency.
- 120/277 Volt Operation.

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" Red Edge Light - Recessed Battery Backup

Code: NYELR-R



Description:

An efficient and secure Exit Sign for recessed mount. Includes backup battery, 120/277 Volt Operation. White aluminum housing. Easy ceiling installation. 8" lettering approved for New York City

Dimensions:

- Ceiling Cut: 14.5" x 2.5"
- Plate Cover: 15.0" x 4.0"
- Exit Sign: 12.5" x 7.5"

Mounted Picture:



Features:

- 5 watts for battery backup units.
- Field installable directional indicators.
- AC on indicator light and test switch.
- Sealed lead battery.
- 120/277 Volt Operation.

NYC 8" Die Cast Red Led - Battery Backup

Code: NYCA-AR




Description:

An efficient and secure exit sign with aluminum cast that is architecturally pleasing. Works on either 120 or 227 VAC. Faceplate includes knock-out left/right arrows. Allows both top or lateral installation.

Dimensions:

- Width: 15.00"
- Height: 10.5"
- Depth: 2.0"



Features:

- Universal 120/277 VAC operation on all exits
- Damp location rated.
- Rugged 20 gauge steel construction.
- Universal canopy included.
- Ni-Cad 4.8 700 mAh Battery Backup
- LED energy savings.
- Universal Knock Out chevrons.
- Spec Grade.
- Push to test switch.
- For Double Face Signs Add \$10.00 per sign.

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" Die Cast Red Led Face

Code: NYCA-ARF



Description:

Additional aluminum face for cast aluminum Red LED exit sign. Faceplate includes knock-out left/right arrows.

Dimensions:

- Width: 15.00"

NYC 8" Combo Red – Steel

Code: NYCOMBOR2



Description:


New York City Approved Exit/Emergency Light (Combo). LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Width: 15.0"
- Height: 15.0"
- Depth: 4"

Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- 12 watt lamp heads.

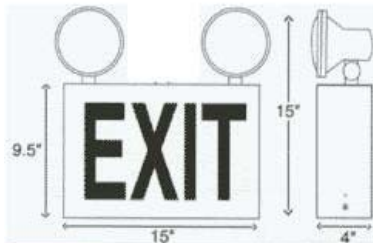

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" Combo Red 3 Heads – Steel

Code: NYCOMBOR3




Description:

New York City Approved Exit/Emergency Light (Combo). LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Width: 15.0"
- Height: 15.0"
- Depth: 4"

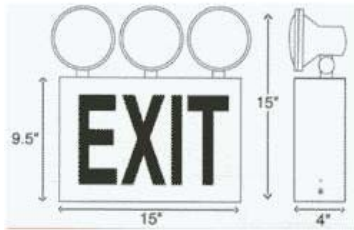

Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- 12 watt lamp heads.

NYC Emergency Light 2Head 18W 6V - Steel

Code: NYCEL2H18W




Description:

New York City Approved Emergency Light. Heavy Duty Construction. Two heads - each lamp 9 watts.

Dimensions:

- Width: 10.0"
- Height: 14.5"
- Depth: 3.0"



Features:

- Universal 120/277 VAC Input.
- Low Voltage Disconnect.
- Rugged 20 gauge steel construction.
- Brownout Protection.
- PAR 36 type lamp heads.

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM


NYC Emergency Light 3Head 36W 12V – Steel
Code: NYCEL3H36W



Description:
 New York City Approved Emergency Light. Heavy Duty Construction. Three heads - each lamp 9 watts.

Dimensions:

- Width: 15.0"
- Height: 15.5"
- Depth: 4.5"



Features:


- Universal 120/277 VAC Input.
- Low Voltage Disconnect.
- Rugged 20 gauge steel construction.
- Brownout Protection.
- PAR 36 type lamp heads.

NYC 8" Red Edge Light - Surfaced Mount AC Only – Aluminum
Code: NYCELSM-RAC



Description:
 An efficient and secure Exit Sign for surfaced mount. Wall and ceiling bracket included. Brushed aluminum housing. 120/277 Volt Operation.

Additional Information:



Features:

- 3 watts for AC only.
- Field installable directional indicators.
- AC on indicator light.
- 120 / 277 Volt Operation

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" LED Red AC Only Steel

Code: NYCSRW



Description:

New York City Approved Exit Sign. LED Energy Savings.

Dimensions:

- Height 10.5"
- Width: 14.25"
- Depth: 2-1/4"

Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- Universal K/O chevrons.

NYC 8" Red Edge Light - Recessed AC only

Code: NYELR-RAC



Description:

An efficient and secure Exit Sign for recessed mount. No backup battery, AC Only, 120/277 Volt Operation. White aluminum housing. Easy ceiling installation. Note AC Only Units are usually installed in a facility with a generator. Units do not have battery back-up power. 8" Lettering approved for New York City

Mounted Picture:
Recessed Mount



Dimensions:

- Ceiling Cut: 14.5" x 2.5"
- Plate Cover: 15.0" x 4.0"
- Exit Sign: 12.5" x 7.5"


Features:

- 3 watts for AC only.
- Field installable directional indicators.
- AC on indicator light and test switch.
- Easy Installation.
- 120/277 Volt Operation.

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" Die Cast Red Led Black - Battery Backup

Code: NYCA-ABR

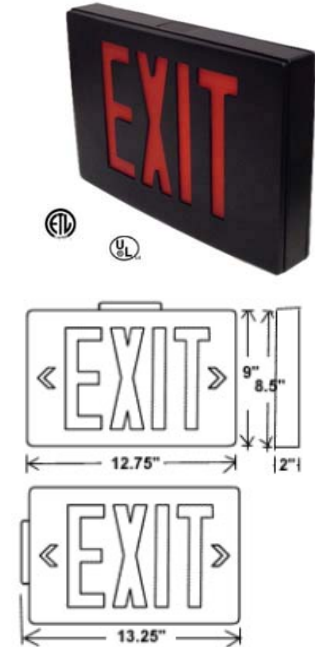

Description:

An efficient and secure exit sign with aluminum cast . Works on either 120 or 227 VAC. Faceplate includes knock-out left/right arrows. Allows both top or lateral installation.

Dimensions:

- Width: 12.75"
- Height: 9.0"
- Depth: 2.0"

Features:

- Ni-Cad 4.8 700 mAh Battery Backup.
- Universal 120/277 VAC operation on all exits.
- LED energy savings.
- Damp location rated.
- Universal canopy included.
- Spec Grade.
- Universal K/O chevrons.
- Push to test switch.
- For Double Face Signs Add \$10.00 per sign.

NYC 8" Die Cast Red Led Black Face

Code: NYCA-BRF



Description:

Additional aluminum face for cast black aluminum red LED exit sign. Faceplate includes knock-out left/right arrows.


Dimensions:

- Width: 12.75"

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" LED Red Battery Backup Black (white shown) - Steel

Code: NYCSRBBB

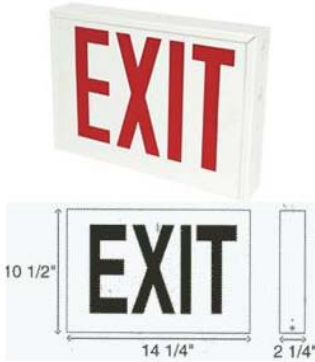

Description:

New York City Approved Exit Sign. LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Height: 10.5"
- Width: 14.25"
- Depth: 2-1/4"

Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- Universal K/O chevrons.

NYC 8" Combo Red Black (white shown) – Steel

Code: NYCOMBOR2B



Description:

New York City Approved Exit/Emergency Light (Combo). LED Energy Savings. Unit can be either single/double faced. WHITE HOUSING SHOWN

Dimensions:

- Width: 15.0"
- Height: 15.0"
- Depth: 4"

Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- 12 watt lamp heads.

HYLINE SAFETY COMPANY
555 Madison Ave. 20th Fl.
New York, NY 10022 USA
Tel. #212-688-5600 / Fax #212-688-6683
E-Mail: Info@HYLINESAFETY.COM

NYC 8" Combo Red 3 Heads Black (white shown) – Steel

Code: NYCOMBOR3B




Description:

New York City Approved Exit/Emergency Light (Combo). LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Width: 15.0"
- Height: 15.0"
- Depth: 4"



Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- 12 watt lamp heads.

NYC 8" LED Red AC Only Black (white shown) – Steel

Code: NYCSR




Description:

New York City Approved Exit Sign. LED Energy Savings. Unit can be either single/double faced.

Dimensions:

- Height: 10.5"
- Width: 14.25"
- Depth: 2-1/4"



Features:

- Universal 120/277 VAC transformers.
- Damp location rated.
- Rugged 20 gauge steel construction.
- Universal K/O chevrons.